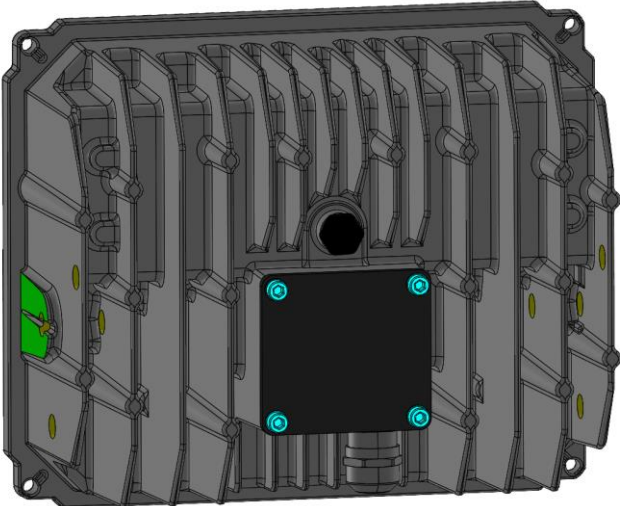
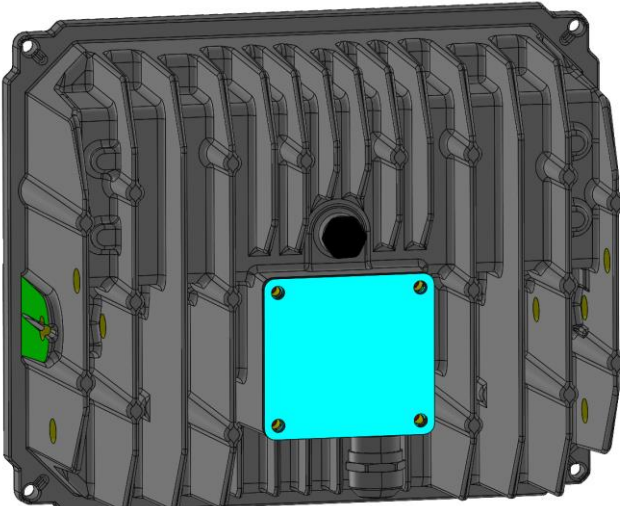
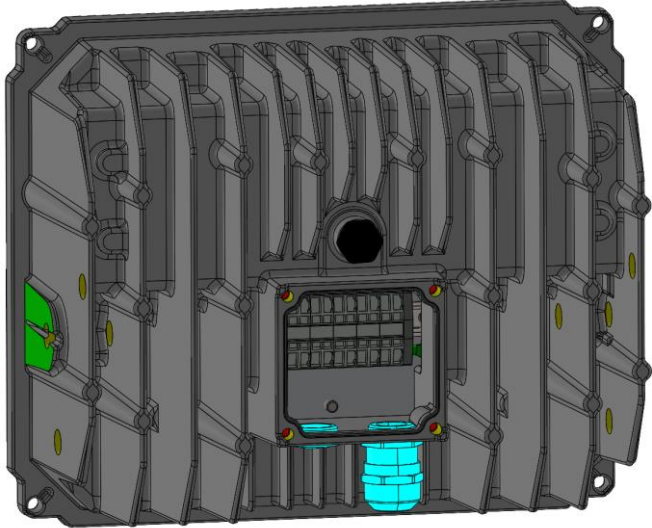
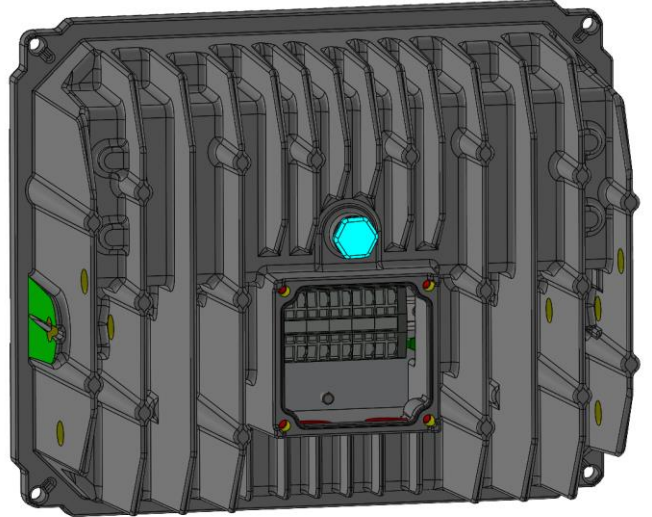
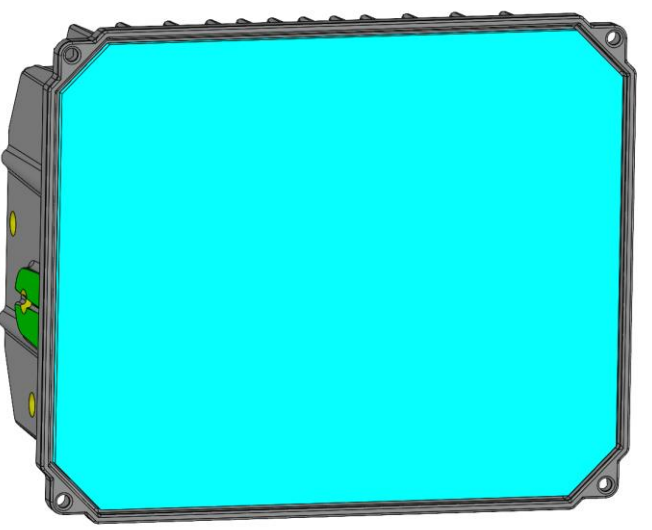
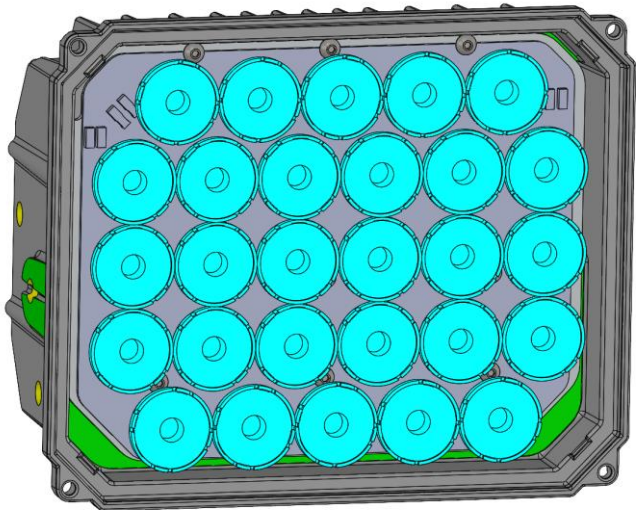
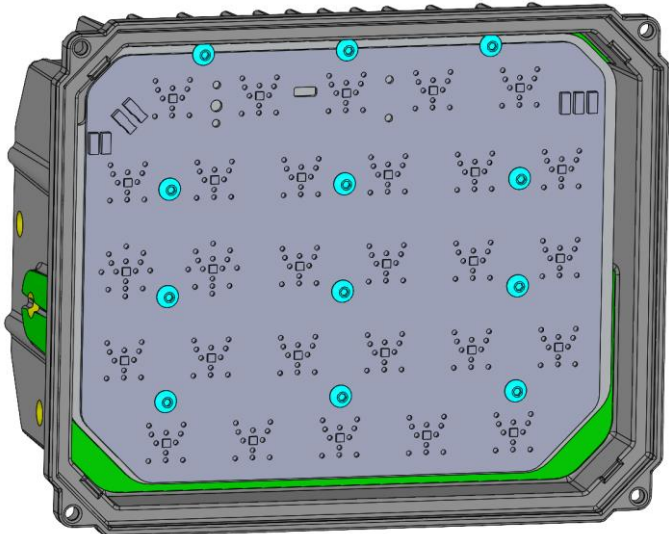
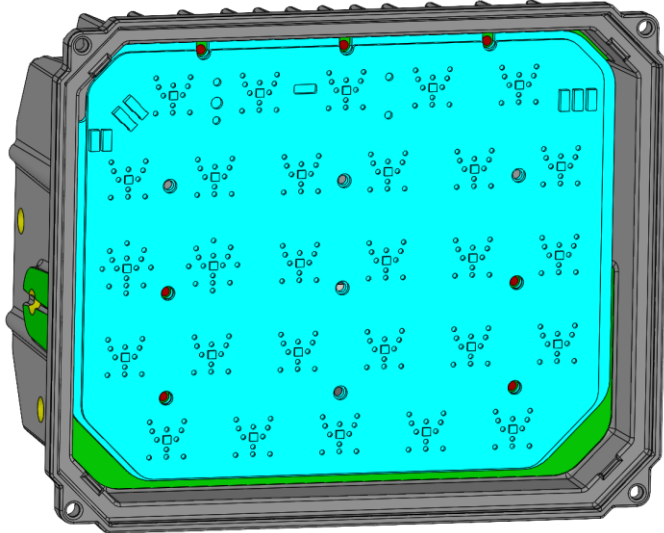
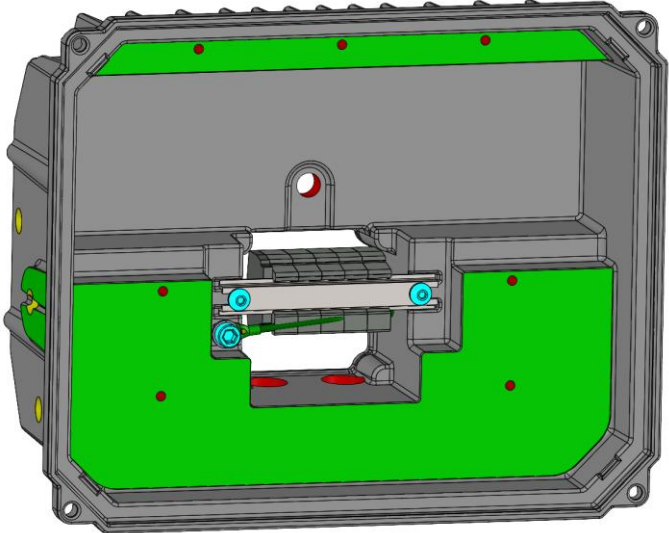
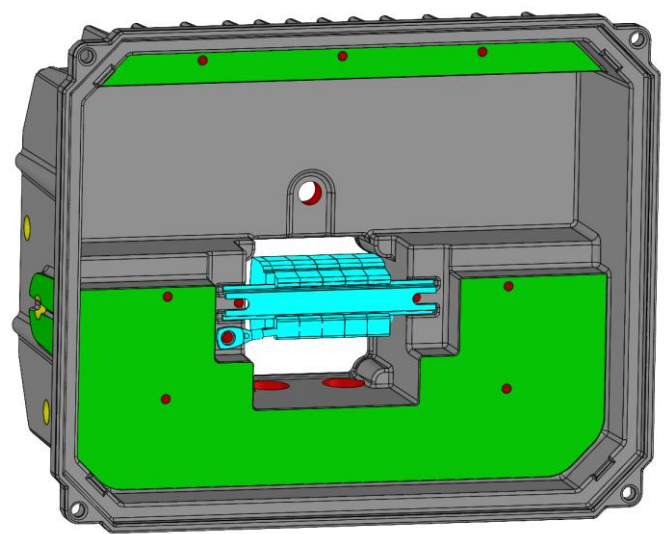


SLX C 24V Searchlight Module

#	Description	Illustration
1	Remove cover screws with 4mm hex key.	
2	Remove cover	

3	<p>Remove cable gland with 24mm spanner and blind plug with a coin or other appropriate tool (2mm).</p>	
4	<p>Remove vent with 16mm hex socket.</p>	
5	<p>Use personal protection equipment.</p> <p>Break glass with hammer.</p> <p>Hardened glass, will break into small pieces.</p>	
6	<p>Remove lenses so that free access to the mounting</p>	

	screws below are accessible.	
7	Unscrew all screws with a 3mm hex key.	
8	Cut wires going to the LED print, remove the LED print board and aluminium plate behind.	

9	Unscrew all screws with a 3mm and 4mm hex key	
10	Remove terminal blocks and earthing cable.	
11	You are left with the fruits of your labor – a clean aluminium casing ready for recycling.	